

The Kilo gear carabiner features an innovative design that makes it particularly robust, stable and easy to use. Two-part aluminum alloy body connects with two stainless steel Torx T20H screws making installation quick and simple. Gear parking position at the top.

A plastic spacer insert allows for a precise fit on any harness (maximum webbing width 45 mm) and integrates with the special slots present on the belts of the GT, Access, Tree Access, Golden Top, and Liberty series harnesses.

Stainless steel wire gate is shaped for smooth action and maintains a low profile to prevent entanglement and accidental opening. Torx T20H allen wrench included.

Working load limit: 20 kg. Safety release breaking load: 150 kg.

**WARNING:** the Kilo must never be used as a safety carabiner.

Two stainless steel Torx Th20 screws making installation quick and simple

Plastic spacer insert for use on webbing up to 45 mm


**Extreme stability** when fixed on the harness thanks to the two screw which allow to compress the 2 parts of the body on the webbing



Gear parking position at the top

Stainless steel wire gate is shaped for smooth action and maintains a low profile to prevent entanglement and accidental opening

Holes for connecting tool lanyards

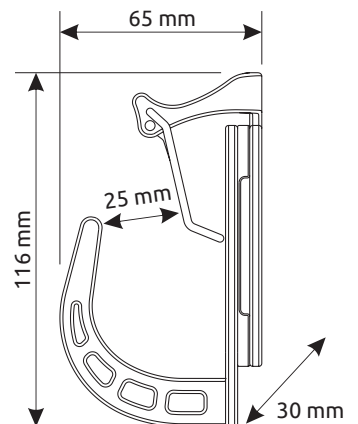

Ref.	Product name	Weight		 mm	Strength	Working load Max
		g	oz			
2917	KILO	52	1.8	25	1.5	20