

IRIDIUM 10.5 mm WITH LOOPS



ROPE

Ref. 2810A

CONFINED, TOWERS/INDUSTRY, ROOFS, SELF RESCUE

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

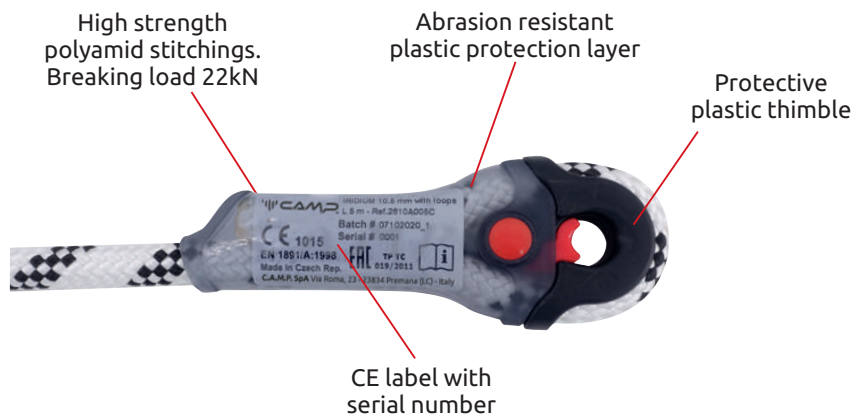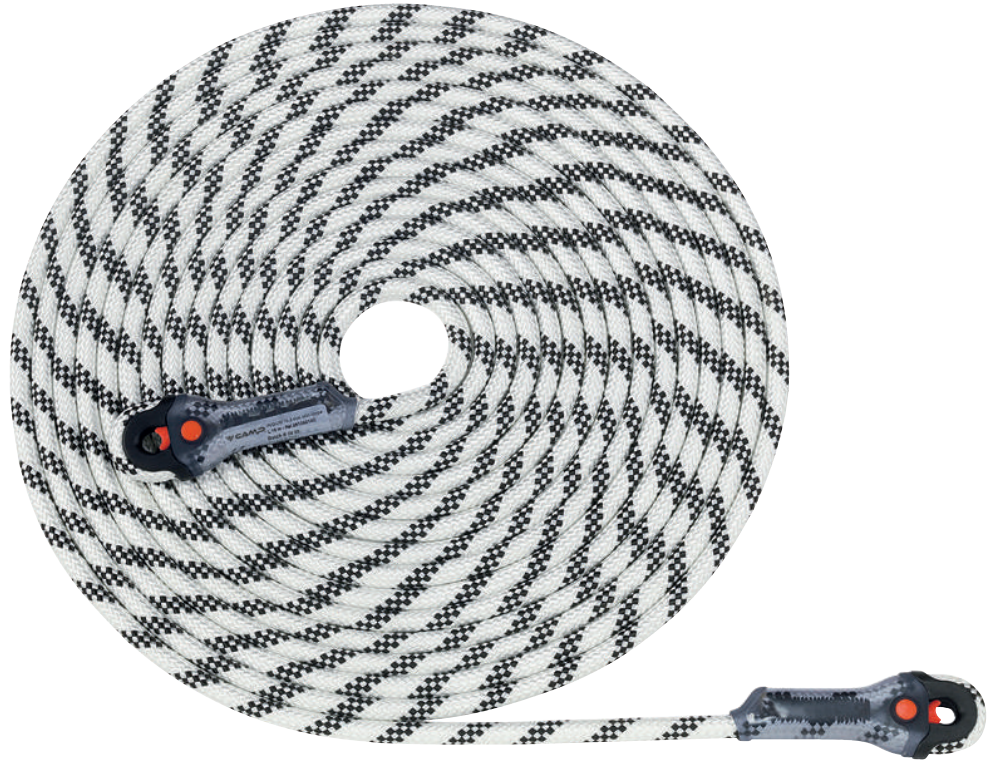

| Ref. | Product name | Length | Weight | | Static strength | Material | CE EN 1891 | EAC |
|-----------|---------------------------------|--------|--------|-------|-----------------|-------------|---------------|-----|
| | | | g | oz | | | | |
| 2810A005C | IRIDIUM 10.5 mm 5 m WITH LOOPS | 5 m | 430 | 15.2 | 22 | Polyamide 6 | A | • |
| 2810A010C | IRIDIUM 10.5 mm 10 m WITH LOOPS | 10 m | 750 | 26.5 | | | | • |
| 2810A015C | IRIDIUM 10.5 mm 15 m WITH LOOPS | 15 m | 1080 | 38.1 | | | | • |
| 2810A020C | IRIDIUM 10.5 mm 20 m WITH LOOPS | 20 m | 1400 | 49.4 | | | | • |
| 2810A030C | IRIDIUM 10.5 mm 30 m WITH LOOPS | 30 m | 2050 | 72.3 | | | | • |
| 2810A040C | IRIDIUM 10.5 mm 40 m WITH LOOPS | 40 m | 2700 | 95.2 | | | | • |
| 2810A050C | IRIDIUM 10.5 mm 50 m WITH LOOPS | 50 m | 3350 | 118.2 | | | | • |
| 2810A060C | IRIDIUM 10.5 mm 60 m WITH LOOPS | 60 m | 4000 | 141.1 | | | | • |

IRIDIUM 10.5 mm WITH LOOPS



ROPE

Ref. 2810A

CONFINED, TOWERS/INDUSTRY, ROOFS, SELF RESCUE

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

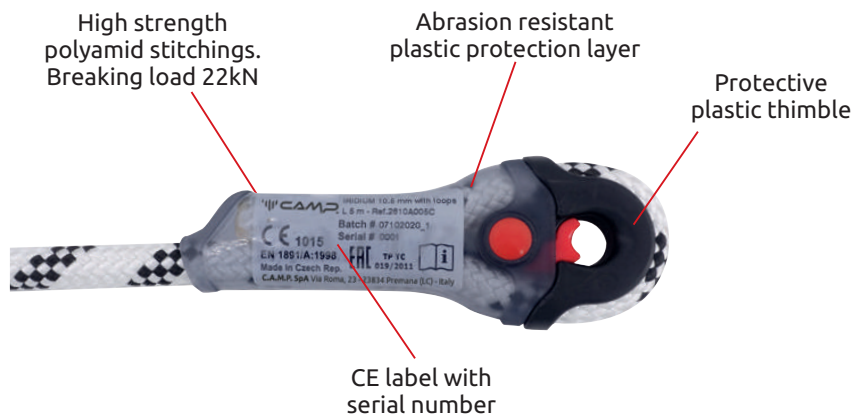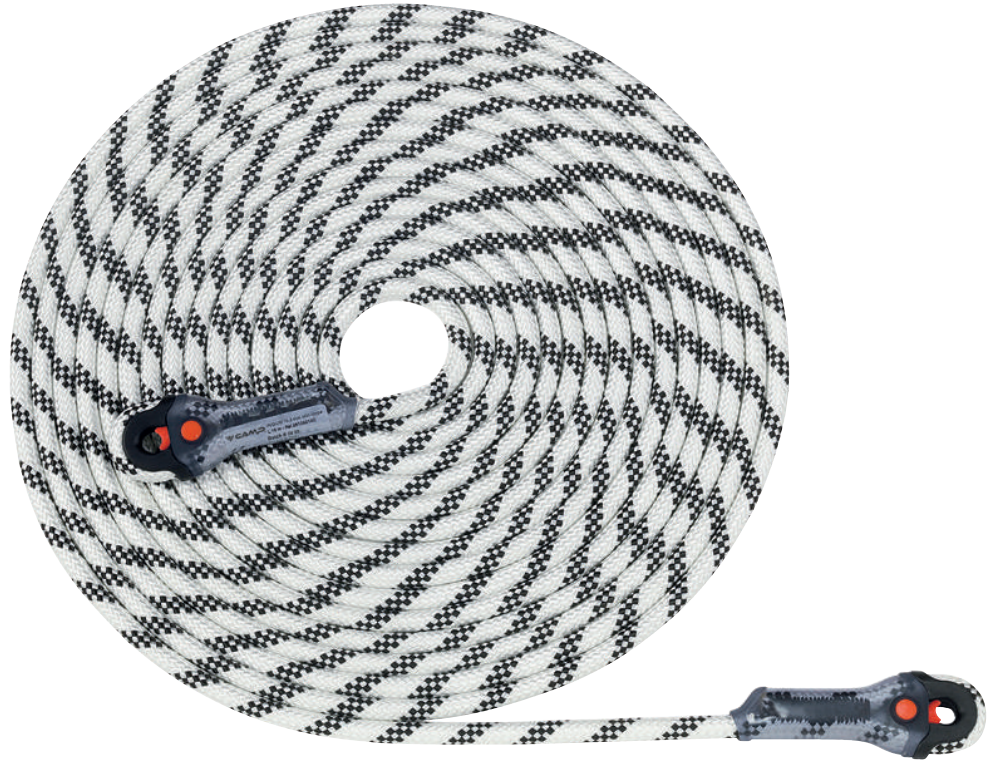

| Ref. | Product name | Length | Weight | | Static strength kN | Material | CE EN 1891 | EAC |
|-----------|---------------------------------|--------|--------|-------|-----------------------|-------------|---------------|-----|
| | | | g | oz | | | | |
| 2810A005C | IRIDIUM 10.5 mm 5 m WITH LOOPS | 5 m | 430 | 15.2 | 22 | Polyamide 6 | A | • |
| 2810A010C | IRIDIUM 10.5 mm 10 m WITH LOOPS | 10 m | 750 | 26.5 | | | | • |
| 2810A015C | IRIDIUM 10.5 mm 15 m WITH LOOPS | 15 m | 1080 | 38.1 | | | | • |
| 2810A020C | IRIDIUM 10.5 mm 20 m WITH LOOPS | 20 m | 1400 | 49.4 | | | | • |
| 2810A030C | IRIDIUM 10.5 mm 30 m WITH LOOPS | 30 m | 2050 | 72.3 | | | | • |
| 2810A040C | IRIDIUM 10.5 mm 40 m WITH LOOPS | 40 m | 2700 | 95.2 | | | | • |
| 2810A050C | IRIDIUM 10.5 mm 50 m WITH LOOPS | 50 m | 3350 | 118.2 | | | | • |
| 2810A060C | IRIDIUM 10.5 mm 60 m WITH LOOPS | 60 m | 4000 | 141.1 | | | | • |

IRIDIUM 10.5 mm WITH LOOPS



ROPE

Ref. 2810A

CONFINED, TOWERS/INDUSTRY, ROOFS, SELF RESCUE

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

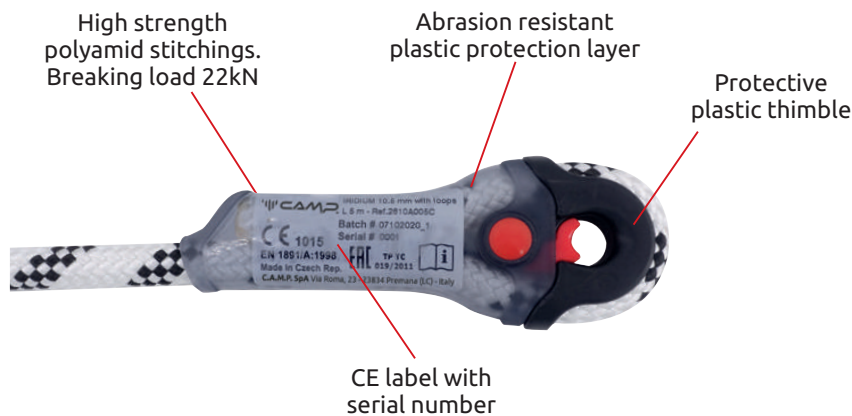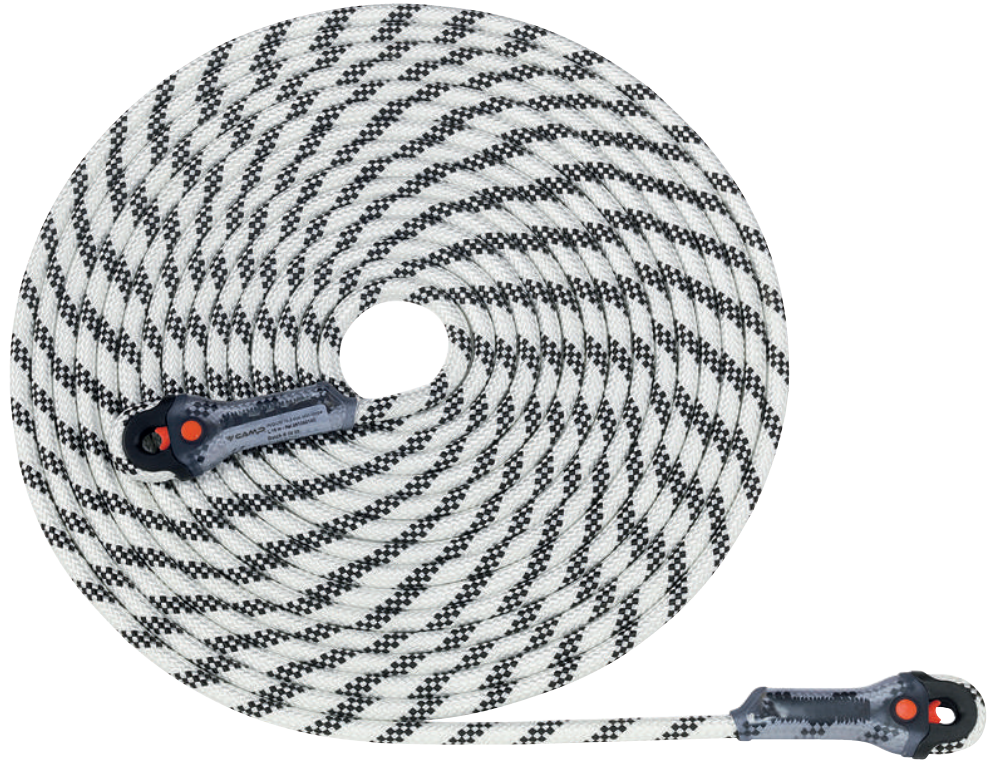

| Ref. | Product name | Length | Weight | | Static strength | Material | CE EN 1891 | EAC |
|-----------|---------------------------------|--------|--------|-------|-----------------|-------------|---------------|-----|
| | | | g | oz | | | | |
| 2810A005C | IRIDIUM 10.5 mm 5 m WITH LOOPS | 5 m | 430 | 15.2 | 22 | Polyamide 6 | A | • |
| 2810A010C | IRIDIUM 10.5 mm 10 m WITH LOOPS | 10 m | 750 | 26.5 | | | | • |
| 2810A015C | IRIDIUM 10.5 mm 15 m WITH LOOPS | 15 m | 1080 | 38.1 | | | | • |
| 2810A020C | IRIDIUM 10.5 mm 20 m WITH LOOPS | 20 m | 1400 | 49.4 | | | | • |
| 2810A030C | IRIDIUM 10.5 mm 30 m WITH LOOPS | 30 m | 2050 | 72.3 | | | | • |
| 2810A040C | IRIDIUM 10.5 mm 40 m WITH LOOPS | 40 m | 2700 | 95.2 | | | | • |
| 2810A050C | IRIDIUM 10.5 mm 50 m WITH LOOPS | 50 m | 3350 | 118.2 | | | | • |
| 2810A060C | IRIDIUM 10.5 mm 60 m WITH LOOPS | 60 m | 4000 | 141.1 | | | | • |

IRIDIUM 10.5 mm WITH LOOPS



ROPE

Ref. 2810A

CONFINED, TOWERS/INDUSTRY, ROOFS, SELF RESCUE

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

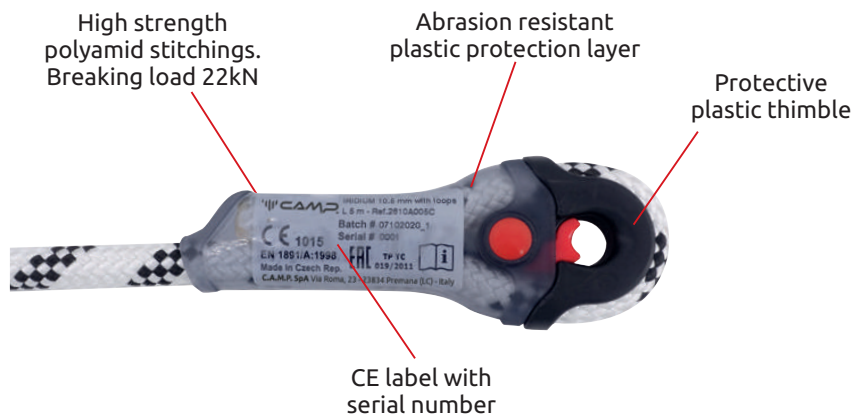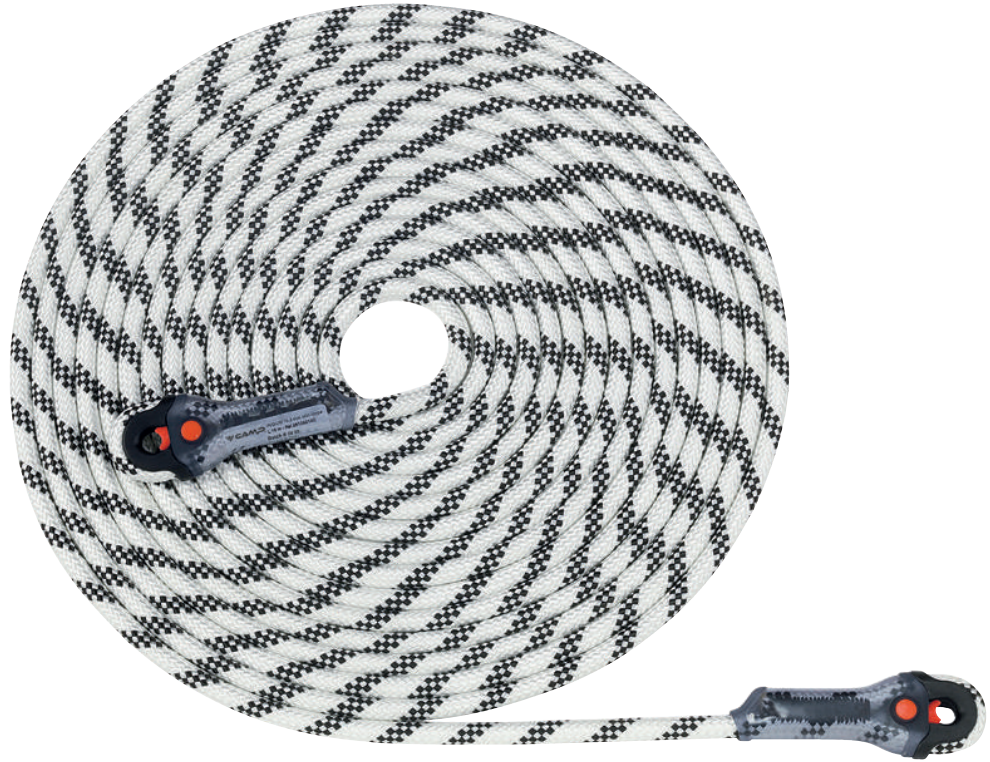

| Ref. | Product name | Length | Weight | | Static strength | Material | CE EN 1891 | EAC |
|-----------|---------------------------------|--------|--------|-------|-----------------|-------------|---------------|-----|
| | | | g | oz | | | | |
| 2810A005C | IRIDIUM 10.5 mm 5 m WITH LOOPS | 5 m | 430 | 15.2 | 22 | Polyamide 6 | A | • |
| 2810A010C | IRIDIUM 10.5 mm 10 m WITH LOOPS | 10 m | 750 | 26.5 | | | | • |
| 2810A015C | IRIDIUM 10.5 mm 15 m WITH LOOPS | 15 m | 1080 | 38.1 | | | | • |
| 2810A020C | IRIDIUM 10.5 mm 20 m WITH LOOPS | 20 m | 1400 | 49.4 | | | | • |
| 2810A030C | IRIDIUM 10.5 mm 30 m WITH LOOPS | 30 m | 2050 | 72.3 | | | | • |
| 2810A040C | IRIDIUM 10.5 mm 40 m WITH LOOPS | 40 m | 2700 | 95.2 | | | | • |
| 2810A050C | IRIDIUM 10.5 mm 50 m WITH LOOPS | 50 m | 3350 | 118.2 | | | | • |
| 2810A060C | IRIDIUM 10.5 mm 60 m WITH LOOPS | 60 m | 4000 | 141.1 | | | | • |

IRIDIUM 10.5 mm WITH LOOPS



ROPE

Ref. 2810A

CONFINED, TOWERS/INDUSTRY, ROOFS, SELF RESCUE

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

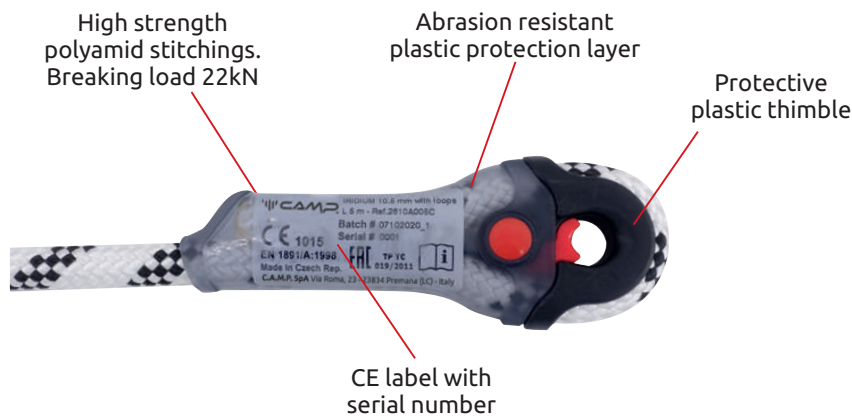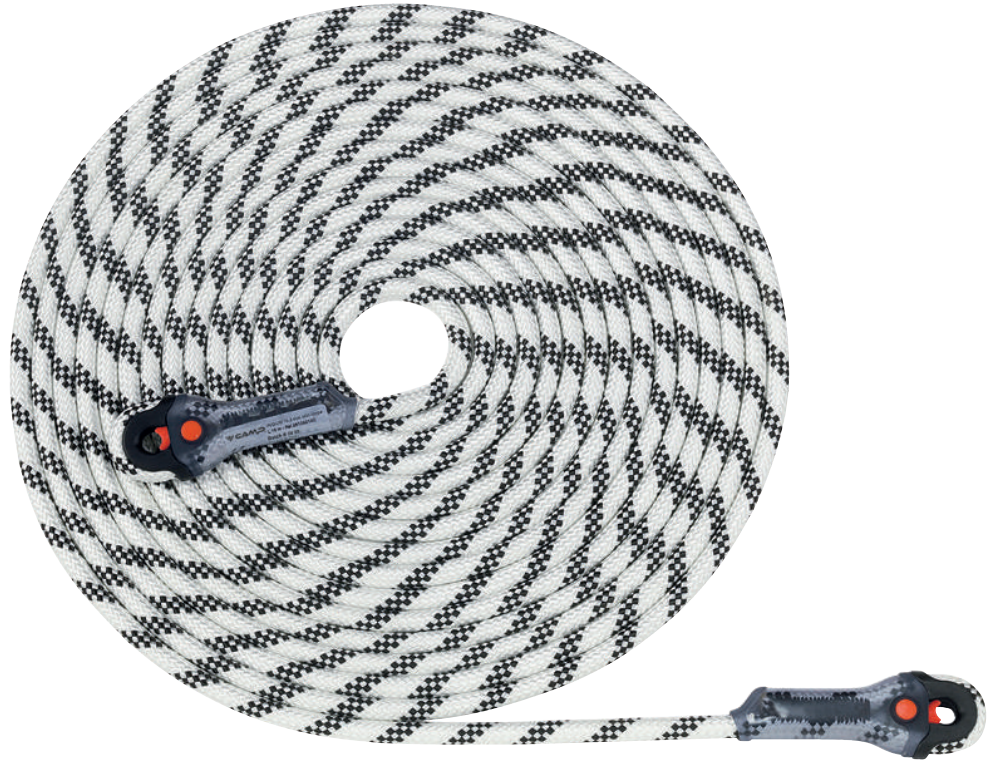

| Ref. | Product name | Length | Weight | | Static strength | Material | CE EN 1891 | EAC |
|-----------|---------------------------------|--------|--------|-------|-----------------|-------------|---------------|-----|
| | | | g | oz | | | | |
| 2810A005C | IRIDIUM 10.5 mm 5 m WITH LOOPS | 5 m | 430 | 15.2 | 22 | Polyamide 6 | A | • |
| 2810A010C | IRIDIUM 10.5 mm 10 m WITH LOOPS | 10 m | 750 | 26.5 | | | | • |
| 2810A015C | IRIDIUM 10.5 mm 15 m WITH LOOPS | 15 m | 1080 | 38.1 | | | | • |
| 2810A020C | IRIDIUM 10.5 mm 20 m WITH LOOPS | 20 m | 1400 | 49.4 | | | | • |
| 2810A030C | IRIDIUM 10.5 mm 30 m WITH LOOPS | 30 m | 2050 | 72.3 | | | | • |
| 2810A040C | IRIDIUM 10.5 mm 40 m WITH LOOPS | 40 m | 2700 | 95.2 | | | | • |
| 2810A050C | IRIDIUM 10.5 mm 50 m WITH LOOPS | 50 m | 3350 | 118.2 | | | | • |
| 2810A060C | IRIDIUM 10.5 mm 60 m WITH LOOPS | 60 m | 4000 | 141.1 | | | | • |